

RFM Series Seismic Zone 4


R. F. Mote now offers a solution for your equipment located in Seismically Active Environments.

Our Seismically Rated Cabinets have been independently tested and certified to UBC Code Seismic Strength Requirements and are Zone 4 compliant to Telcordia (Bellcore) GR-63-CORE specifications.

Built around our standard R.F. Mote Frames, Seismic Cabinets are available Pre-Configured with our standard Mounting Rails, Cable Managers, Shelves, Power Bars, and Fans. A variety of seismic rated Doors & Side Panels are also available. To maintain seismic rating requirements, assembled units must be bolted to the floor and all doors are required to incorporate 3 point latching systems which c/w an integrated combination lock with key override. Seismic rated side panels are bolted onto the frame internally. For security purposes, the bolts cannot be removed from outside the cabinet.



RFM-243683 secured, with 3-Point Latching, Smoked Acrylic front door, and solid side panels

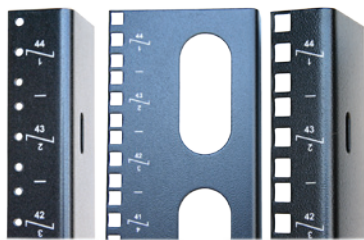

Standard Features Include:

- Heavy gauge steel fully welded construction
- Various Heights: 35" / 59" / 72" / 83"
- Various Depths: 30" / 36" / 42"
- Various Widths: 24" / 30"
- 4 cage nut style Mounting Angles with silkscreened U-markings (also available tapped #10-32)
- All doors are 3-point latching and lift off for ease of equipment and cable installation
- EIA rails c/w silkscreened numbered "U" markings and available tapped or cage-nut style for equipment mounting
- Open base for cable access
- Multiple cable access/fan openings provided in top of cabinet
- 4 grounding points



RFM-303683 with Smoked Acrylic front door and Louvred rear door, Vertical Cable Managers, Cage-Nut Style Mounting Angles



Optional Features Include:

- Various shelves - cantilever and 4-point mounting
- Several styles of vertical and horizontal cable managers, high density and regular cable management available
- Overhead horizontal cable troughs for 24" & 30" wide cabinet
- Various styles of power bars
- Various side panels: solid or perforated
- Several door options:
 perforated / smoked acrylic / louvred / solid
- 4" Fans and 10" Fans
- 840 CFM cold air distribution unit
- 420 CFM ~ 1680 CFM directional hot air exhaust unit
- Blank Plates
- Airstops
- Gasket kits